

MB Companies, Inc. MSV - Multi Service Vehicle Attachment



High Capacity Snow Blower



Efficient

The MSV snow blower features dual direct drive hydraulic motors on the ribbon and a PTO driven impeller. The impeller housing is lined with 3/8" poly carbonate to protect the surface while increasing overall efficiency. The hydraulically driven ribbon eliminates high wear parts such as chains, gearboxes, and sprockets.

Durable

The chute rotation is completed by a chain and sprocket system – no more loose or tangled cables. A poly carbonate liner and four steel rollers secure the chute and allow for easy rotation. Reversible tungsten carbide skid shoes for superior life.

Safe

In the event of an impact, the impeller is protected by a shear pin in the PTO shaft and a pressure relief in the hydraulic system protects the ribbon.

Other Features

- Serrated ribbon cuts through and breaks-up hard packed and drifted snow.
- Two-stage design with hydraulically driven ribbon and PTO driven impeller.
- Standard width is 50 inches to fit most sidewalk applications. Other widths are available.
- Hydraulically controlled chute rotation and deflector.

Options

- Truck Loading Chute
- Custom Colors
- Custom Widths
- Bi-directional Valve - Allows ribbon to reverse to clear clogged or built-up snow.

MB Companies - MSV Sales

1615 Wisconsin Avenue / New Holstein, Wisconsin 53061

1-800-558-5800 / sales@m-bco.com

www.m-bco.com



HIGH CAPACITY SNOWBLOWER




REQUIREMENTS:

- ◆ Three Point Hitch
- ◆ PTO 540 RPM
- ◆ One High Flow Hydraulic Circuit (20 GPM)
- ◆ Two Low Flow Hydraulic Circuits (2-5 GPM)



Optional Folding Loading Chute

MODEL	HDSB 50"	HDSB 72"
Width - A	50"	72"
Height	80.0" Chute Down 92.0" Chute Up	80.0" Chute Down 92.0" Chute Up
Length	53"	53"
Intake Height	43"	43"
Operating Weight	1400 lbs	1600 lbs
Impeller Diameter	29.0"	29.0"
Impeller Depth	12"	12"
Impeller Blades	4	4
Auger Diameter	32.0"	32.0"
Chute Discharge Rotation (Hydraulically Controlled)	195°	195°
Deflector Control	Hydraulic	Hydraulic
Throw Distance	Up to 50 ft	Up to 50 ft
Cutting Edge (Bolt on)	.5 x 4.0"	.5 x 4.0"
Tons Per Hour	700 Tons	700 Tons

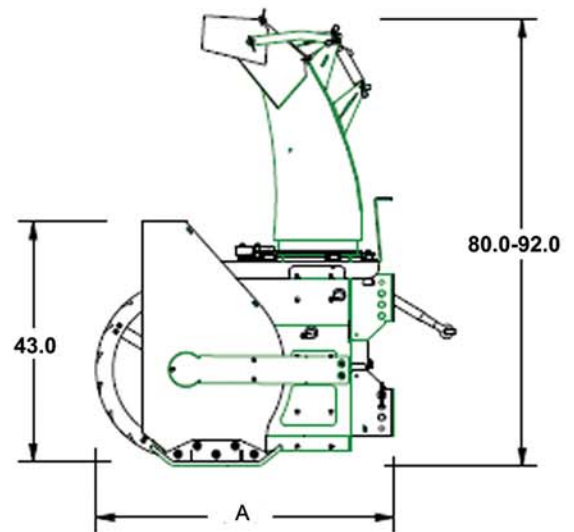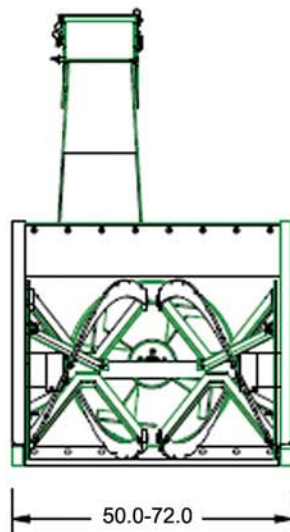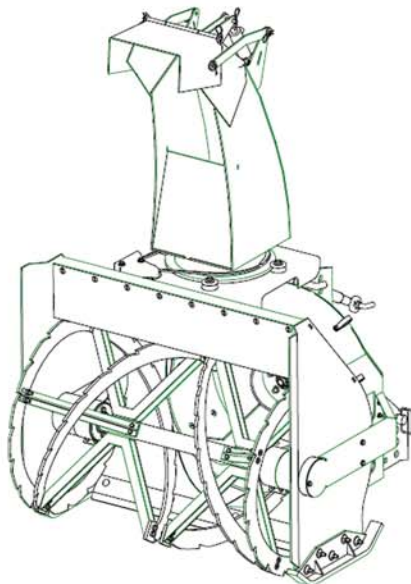

MSV Sales

1615 Wisconsin Avenue
New Holstein, Wisconsin 53061
1-800-558-5800

